



Series FSB 35 Direct Mount 3-Piece

Full Port Ball Valves

1/4" – 4" (DN8 – DN100)
2000 psi (PN140)

www.valvesolution.com.au



FIRE-SAFE



ANTI-STATIC



SAFETY
ASSURANCE

Strong & Reliable

With the increasing demand of fire-safe ball valves, DIE ERSTE is proud to introduce the new Series FSB 35 Ball Valves. FSB 35 ball valves are most suitable where operational perfection is needed, especially in the event of a fire. DIE ERSTE FSB 35 ball valves assure bubble tight sealing and zero leakage in high pressure and fire conditions.

Series FSB 35 has been approved to API 607 4th Edition, with the combination of graphite sealing, secondary fire-safe contact, anti-static stem, and strong body bolts. Series FSB 35 ball valves offer secondary sealing for superior sealing effects. In high pressure condition, two sets of sealing rings are used to prevent leakage. In fire condition, the secondary sealing rings become the main sealing elements after the PTFE seats have been burnt away.

Anti-static devices are also installed on the stem. During the ball valve operation, static charge build up between ball and seat, and can be potentially dangerous with inflammable fluids. To solve the problem, small metal ball and spring are used to discharge the static and maintain the electric continuity.

Instead of four long body bolts in the conventional three piece ball valves, FSB 35 ball valves use eight strong body bolts to secure connections between center piece and two side caps. For larger sizes, twelve body bolts are used. The tensile body bolts are screwed into the center piece for maximum closure, and also prevent expansion of the bolts.

(A) ISO5211 Actuator Direct Mount

Square stem and twin ISO 5211 pattern mounting pad allow for easy actuator installation without bracket and adaptor.

(B) Stem Packing

Self-adjusting stem packing assembly with Belleville washers for temperature variation, vibration, and security. In FSB ball valves, graphite stem packing is used to prevent leakage through stem.

(C) Blowout-Proof Stem

The stem is inserted from inside the body bore. This particular design prevents the stem from shooting out when there is excess pressure in the bore caused by high temperature heat.

(D) Anti-Static Device


All FSB ball valves are equipped with Anti-static Device in the ball bore. This device provides a grounding path between the valve body and the ball for static electric charges.

(E) Body Bolts

The hinge on the central body provides the alignment of body to the end connection. In FSB ball valves, eight body bolts are screwed into the body to secure the valve structure in high pressure environment. Twelve bolts are used for larger sizes of Series FSB 35 ball valves.

(F) End Connection


The Series FSB 35 ball valve is available with threaded end, butt-welding, socket-welding. Other connection type is available upon request.

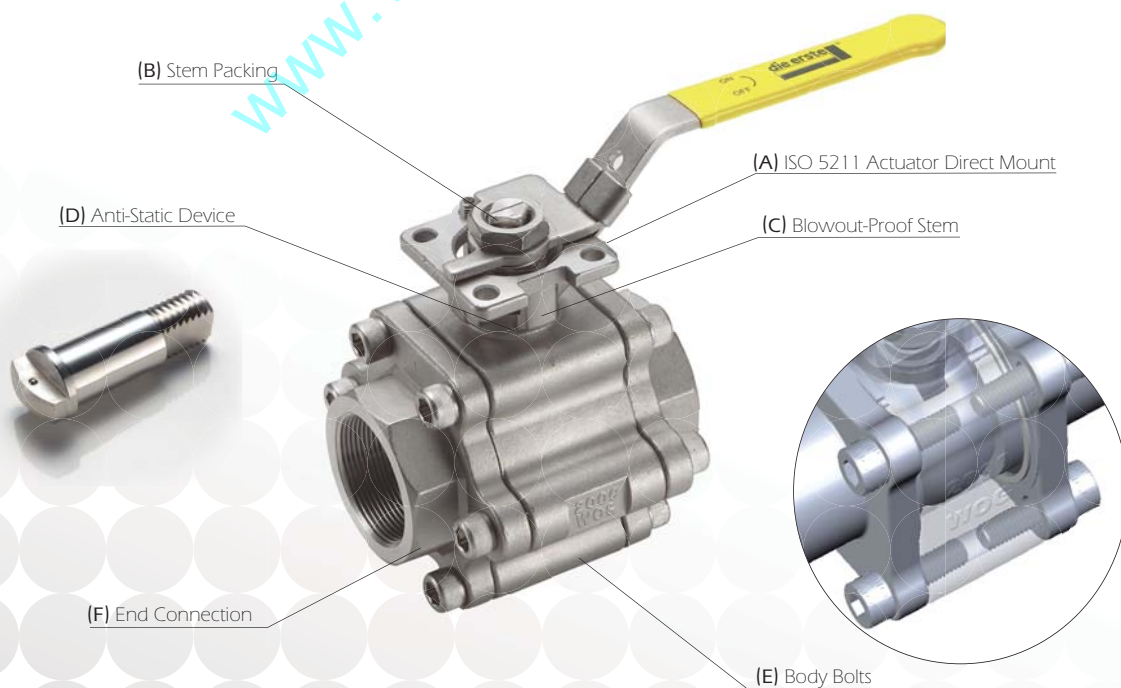

Fire-Safe Design

Fire-Safe Contact Surface

The end cap is specially designed and machined precisely to fit with the valve ball surface. During the event of fire, the soft ball seat may disintegrate in high temperature due to the nature of the material. Thus, the valve ball comes into contact with the fire-safe contact surface and forms a secondary metal-to-metal seal. The downstream flow pushes the floating ball to the side, and effectively seals the bore.

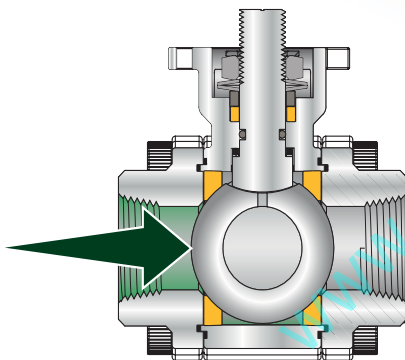

Before a fire



After a fire

Graphite Stem Seals and Packing

With the high temperature resistance property, graphite becomes the perfect material of choice for sealing parts. The graphite sealing rings are enclosed in a compartment and will not be in touch with the fluid. Therefore, regardless of the temperature and pressure, graphite seals stay immobile and continuously prevent leakage from or into the joined parts while under compression.




Seals and Packings

Dual Body Seal

Series FSB 35 ball valves utilize two sets of body seals to prevent leakage. The inner body seal which are made with PTFE, for the purposes of avoiding graphite contamination in the fluid, though the chances are rare. The outer body seal is made with graphite material for fire-safe reason. Both seals are securely placed in the groove to avoid movements.

Direct Mounting Pad

The dual ISO direct mounting pad allows precise and flexible mounting of actuator. Usually two sets of mounting holes are drilled for different actuator sizes. With the integrally cast top mounting platform, machined flat surface and square stem, the design ensures correct alignment of the actuator to effectively minimize the side-loading during high cycle or continuous duty applications. The well-supplied (air or electric power) actuation equipments can be removed safely and easily while the valve is under the line pressure.

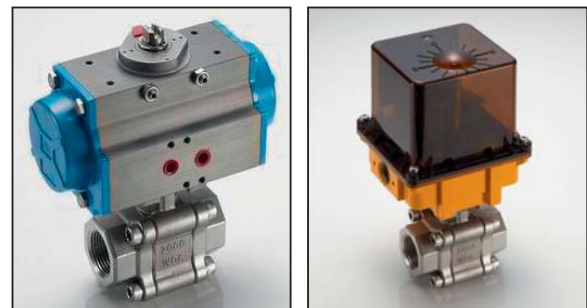

Direct Mount with Actuators

CE Marking **C E** 0035

The whole series of ball valves are approved according to European Directive 97/23/EC.

Vacuum

Standard Series 35 ball valves, can be rated to hold in part of the "Medium Vacuum" range to 52 TORR (mm of Hg) or 52000 microns in temperature ratings from -20°F to 350°F (-28°C to 180°C). Here only PTFE seats and seals are highly recommended for this vacuum service. Please consult with us for a customizing solution.

Size Range

1/4"~4" (DN8~DN100)

Standards

ASME B16.34, B16.25, B1.20.1

API 607, API6D, API 598

ISO 5211, ISO 5209, ISO 228-1, ISO 7-1, ISO 261, ISO 10497

DIN EN 10204, DIN 259/2999, DIN EN 10226

MSS SP-25, MSS SP-72

BS 5351

Marine Application

Casting from Lloyd's or DNV approved foundry available upon request.

Certifications of Series FSB 35:



API 607 Fire Test for Soft Seated Quarter Turn Valves



Canadian Registration Number



ATEX Directive 94/9/EC Explosive Prevention



Low Emission Certified TA-Luft 2002, Sec. 5.2.6.4 VDI 2440 2000, Sec. 3.3.1.3



Pressure Rating:

2000 psi WOG (PN140)

150 psi (10 bar) with saturation steam

Temperature Range:

• -20°F to 350°F (-28°C to 180°C) with TFM 1600 seat

• -20°F to 350°F (-28°C to 180°C) with RPTFE seat

• -20°F to 350°F (-28°C to 180°C) with PTFE seat

End Connection:

• Female threaded to NPT, DIN 259/2999, and BS standards

• Butt-welding ends


• Socket-welding ends

Body Material:

ASTM CF8M, CF8, WCB

DIN 1.4408, 1.4308, 1.0619

Pressure and Temperature Rating (Seat Material)

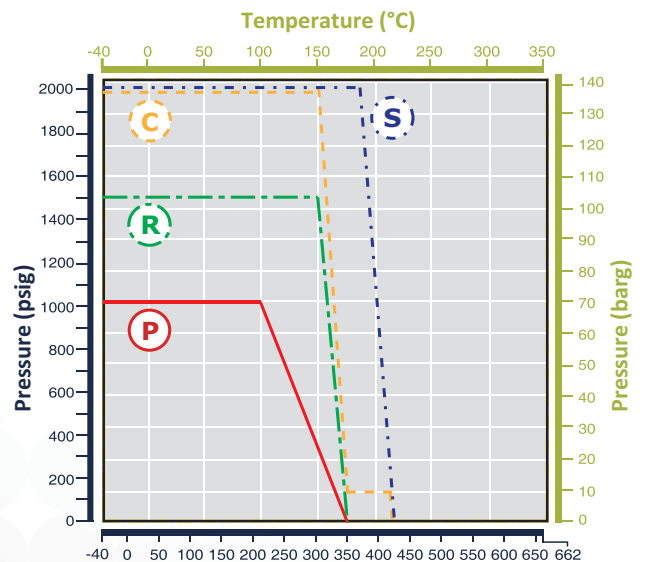


P — VIRGIN PTFE




R — RPTFE (15% GLASS FILLED PTFE)

C — CARBON FILLED PTFE

S — S/S POWDER FILLED PTFE

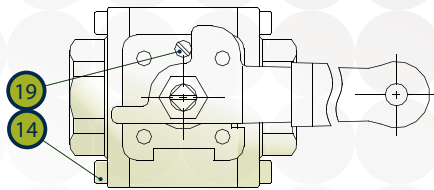

Anti-Static Device :
The conductive path from stem to body

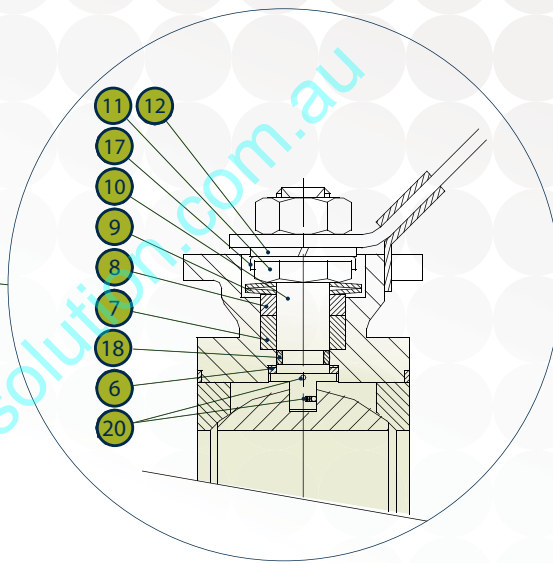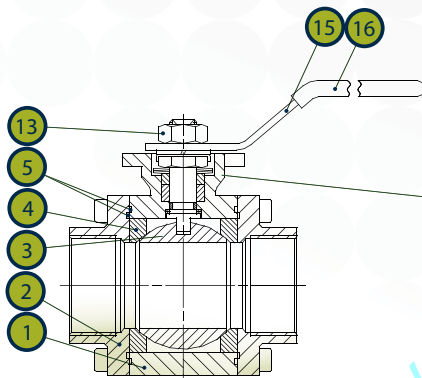


NO	PART NAME	MATERIAL
1	BODY	CF8M / WCB
2	END CAP	CF8M / WCB
3	SOLID BALL	CF8M / CF8
4	BALL SEAT	TFM 1600 RPTFE 15% RPTFE 25% PTFE
5	BODY SEAL	PTFE & GRAPHITE
6	THRUST WASHER	PTFE & GRAPHITE
7	STEM PACKING	GRAPHITE
8	GLAND	SS 304
9	BELLEVILLE SPRING	SS 301
10	STEM	SS 316 / SS 304

NO	PART NAME	MATERIAL
11	NUT	SS 304
12	SPRING WASHER	SS 304
13	NUT	SS 304
14	BOLT	SS 304
15*	HANDLE	SS 304/ Zinc PLATED STEEL
16	HANDLE SLEEVE	VINYL
17	SADDLE WASHER	SS 304
18	O-RING	NBR VITON
19	STOP PIN	SS 304/WCB
20	ANTI-STATIC	SS 316/SS 304

*Round bar handle is provided for size 2½" to 4" (DN65 - DN100)

Dimensions inch/mm

SIZE Inch DN	D	L	L ₁	W	H	E	F	G	A	B	C	ISO 5211
1/4" 6	0.4 11	2.55 65	2.75 70	5.51 140	2.75 70	0.35 9	0.31 8	1.47 37.5	0.54 13.8	0.56 14.2	0.39 10	F04
3/8" 10	0.43 11	2.55 65	2.75 70	5.51 140	2.75 70	0.35 9	0.31 8	1.47 37.5	0.68 17.3	0.69 17.6	0.39 10	F04
1/2" 15	0.55 14	2.95 75	2.95 75	5.51 140	2.75 70	0.35 9	0.31 8	1.47 37.5	0.85 21.7	0.86 21.8	0.51 13	F04
3/4" 20	0.81 20.5	3.14 80	3.54 90	7.08 180	3.54 90	0.43 11	0.43 11	1.97 50	1.07 27.2	1.07 27.2	0.59 15	F04 F05
1" 25	1.00 25	3.54 90	3.93 100	7.08 180	3.93 100	0.43 11	0.43 11	2.36 60	1.34 34	1.34 34	0.59 15	F04 F05
1 1/4" 32	1.24 31.5	4.33 110	4.33 110	8.46 215	4.40 112	0.55 14	0.63 16	2.83 72	1.68 42.7	1.68 42.7	0.59 15	F07
1 1/2" 40	1.46 37	4.72 120	4.92 125	8.46 215	4.52 115	0.55 14	0.63 16	2.99 76	1.91 48.6	1.92 48.8	0.63 16	F07
2" 50	1.97 50	5.51 140	5.90 150	8.46 215	5.23 133	0.55 14	0.63 16	3.66 93	2.38 60.5	2.41 61.2	0.67 17	F07
2 1/2" 65	2.56 65	7.28 185	7.48 190	14.96 380	6.81 173	0.86 22	0.94 24	4.58 116.5	3.00 76.3	2.91 73.9	0.67 17	F07 F10
3" 80	3.15 80	8.07 205	8.66 220	14.96 380	7.24 184	0.86 22	0.94 24	5.00 127	3.50 89.1	3.53 89.8	0.67 17	F07 F10
4" 100	3.94 100	9.45 240	10.63 270	23.62 600	9.53 242	1.06 27	1.14 29	6.26 159	4.5 114.3	4.53 115.2	0.79 20	F10

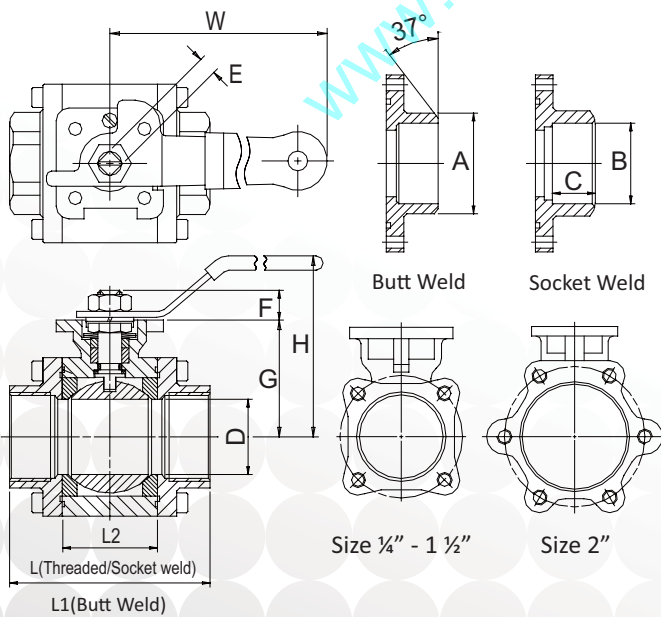

Valve Size		Torque (N·m)	Torque (lbs·in)
inch	DN		
1/4	8	8	70.8
3/8	10	8	70.8
1/2	15	8	70.8
3/4	20	11	97.4
1	25	16	142
1 1/4	32	23	204
1 1/2	40	33	292
2	50	40	354
2 1/2	65	72	637
3	80	85	752
4	100	160	1416

Note: Safety factor is not included for torque value.

UHMWPE – Ultra High
Molecular Weight Polyethylene



Valve Seat Selection

Please contact your sales for more properties of materials

Reinforced PTFE,
15% & 25

Carbon Filled
PTFE, 15%

PEEK®

Seat Code	Description	Temperature Range
VIRGIN PTFE	The most common material of seat ring. With excellent chemical resistance, PTFE can be used almost in all media.	-28°C to 180°C (-20°F to 350°F)
RPTFE (15% GLASS FILLED PTFE)	Similar to PTFE, but offers higher pressure capacity while temperature is increasing. The material itself is harder than conventional PTFE. Please specify the application due to confusion with PTFE.	-28°C to 180°C (-20°F to 350°F)
CARBON FILLED PTFE	Specially used for steam and thermal oil, with low coefficient of friction. The chemical resistance is similar to PTFE and RPTFE. 15% carbon and 25% carbon are provided.	-28°C to 220°C (-20°F to 428°F)
S/S POWDER FILLED PTFE	Combined with the strength of stainless steel and lubricity of PTFE, 50% SS316 powder is added to 50% PTFE. Abrasion resistance of metal and higher pressure rating than RPTFE.	-28°C to 220°C (-20°F to 428°F)
TFM1600	TFM is a modified PTFE which reduces permeation to provide advantages for corrosive applications or those applications where PTFE is used as a barrier to protect against or contain aggressive chemicals.	-28°C to 180°C (-20°F to 350°F)
DELRIN	High pressure seat material. Delrin material is able to sustain pressure up to 5000 psig. However, it is not recommended to use in oxygen applications.	-40°C to 80°C (-40°F to 180°F)
PEEK	Highest pressure resistance. Excellent in recovery from deformation, and high degree of dimensional stability. High mechanical strength.	-28°C to 220°C (-20°F to 428°F)

Automation Accessories

Pneumatic Actuators

VT Series – Rack & Pinion Type

The VT Series rack & pinion actuators are reliable quality products, which can be relied on to perform faultlessly under any difficult circumstances. For double-acting mode, the actuator is available in 11 sizes. Under the provision of common power supply (80 psi), the output torque ranges from 8.02 to 2877 Nm (71 to 25469 in-lbs). For single-acting, also known as spring return type, 10 sizes are available.



Electric Actuators

JS Series

The Jexme electric actuators are made in new sizes from 34.3 to 597.8 Nm (303.6 to 5290.8 in-lbs), which are generally applied for ball valves with maximum size 6", and butterfly valves with maximum size 12", and are available in on-off or modulating versions, with a choice of duty cycles. All models include standard manual override, visual position indicator, torque limiter and adjustable-position switches.







VSII™ Namur Type Solenoid Valves for Valve Actuator

VSII™ namur type solenoid valve is specifically engineered to pilot pneumatic process valve actuators. Using enhanced materials, VSII™ has an operating temperature range from -20°C up to 50°C (-4°F up to 140°F). The most notable improvement is the patented rotary sealing plate. It features in the field conversion form 3/2 to 5/2 action without the need for tools or additional parts, and incorporates exhaust feedback to increase actuator spring life span.



Other Fire-safe Products

FSB 26	FSB 2D	FSB 23	FSB 1D	FSB 22
				
6000 psi (420 bar) DN8 - DN50	CLASS150 (PN16/40) DN15 - DN100	3000 psi (210 bar) DN8 - DN50	PN16/PN40 DN15 - DN100	2000 psi (140bar) DN8 - DN50