



Series 32

Mounting Pad 3-Piece

Full Port Ball Valves

1/4" – 4" (DN8 – DN100)

1000 psi (PN64)



Ball Valve Feature Mounting Pad

DIE ERSTE's Series 32 ball valves provide the 3-piece design with the highest flexibility in selection of end connections and seat materials. The 3-piece design features in-line and out-of-line maintenance as the center section can be easily accessed without disturbing the pipe connections. Integrally ISO 5211 cast mounting pads ensure alignment and convenience for ease automation with the bracket and adaptor. All of these valves are suitable for applications requiring high flow capacity and tight shutoff, where reliability, functionality and interchangeability are essential for the product quality at an economical price.

Mounting Pad

The integrally cast mounting pad, complying with ISO 5211 standard, ensures the ease for actuator mounting.

Ease of Maintenance

The center section can swing out after removing the body bolt which goes through the body hinge, loosen the remaining bolts, eliminating the need to cut a valve out of line and having to replace both the valve and the pipe.

Pressure Rating:

1000 psi WOG (PN64)
150 psi (10 bar) with saturation steam

Temperature Range:

-20°F to 400°F (-28°C to 204°C) with PTFE/RPTFE

Body Material:

ASTM CF8M, CF8, WCB
(DIN 1.4408, 1.4308, 1.0619)

End Connection:

Threaded
Butt-welding
Socket-welding
Custom-build

CE Marking  0035

The whole series of ball valves are approved according to European Directive 97/23/EC.

Standards and Specifications

Valve stems are blowout-proof for maximum safety and meet ASME/ANSI B16.34 specifications.
All valves are factory tested to API 598 and MSS SP-72.


Threaded/Socket-welding end-to-end length meets
DIN 3202 M3 (except 1/4" & 1/8")


Socket-welding end-to-end length meets
DIN 3202 S13

Sanitary Clamp End Dimension is according to
BS 4825-3

Valve body and end cap connections are high quality investment cast. Both materials of stainless steel and carbon steel can be solution annealed and normalized upon requests. Body and end cap is based designed by ASME B16.34.

Valve Body Rating with Seat Material Plot:

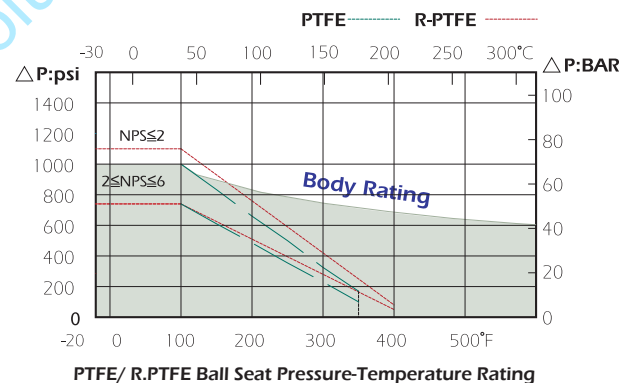

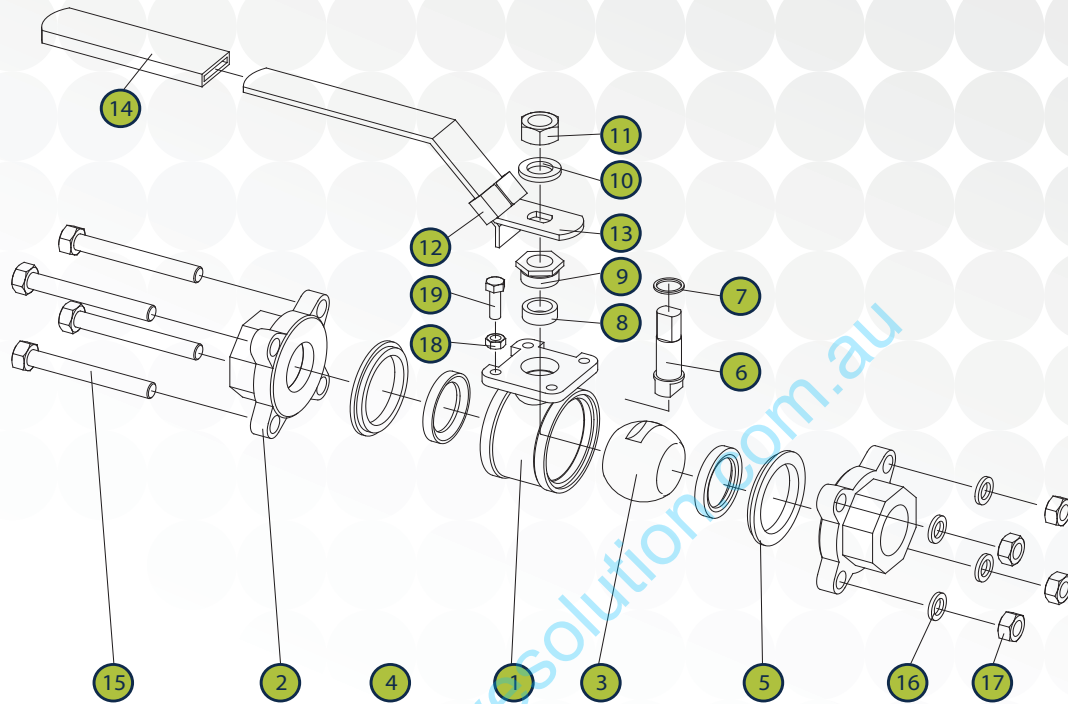

NO	PART NAME	MATERIAL
1	BODY	CF8M / CF8 / WCB
2	END CAP	CF8M / CF8 / WCB
3	SOLID BALL	CF8M
4	BALL SEAT	PTFE
5	BODY SEAL	PTFE
6	STEM	SS 316
7	THRUST WASHER	PTFE
8	STEM PACKING	PTFE
9	GLAND NUT	SS 304
10	WASHER	SS 304

NO	PART NAME	MATERIAL
11	HANDLE NUT	SS 304
12	LOCKING DEVICE	SS 304
13	HANDLE	SS 304
14	HANDLE SLEEVE	VINYL
15	BOLT	SS 304
16	WASHER	SS 304
17	NUT	SS 304
18	STOP NUT	SS 304
19	STOP BOLT	SS 304

