


THIS WAS YESTERDAY

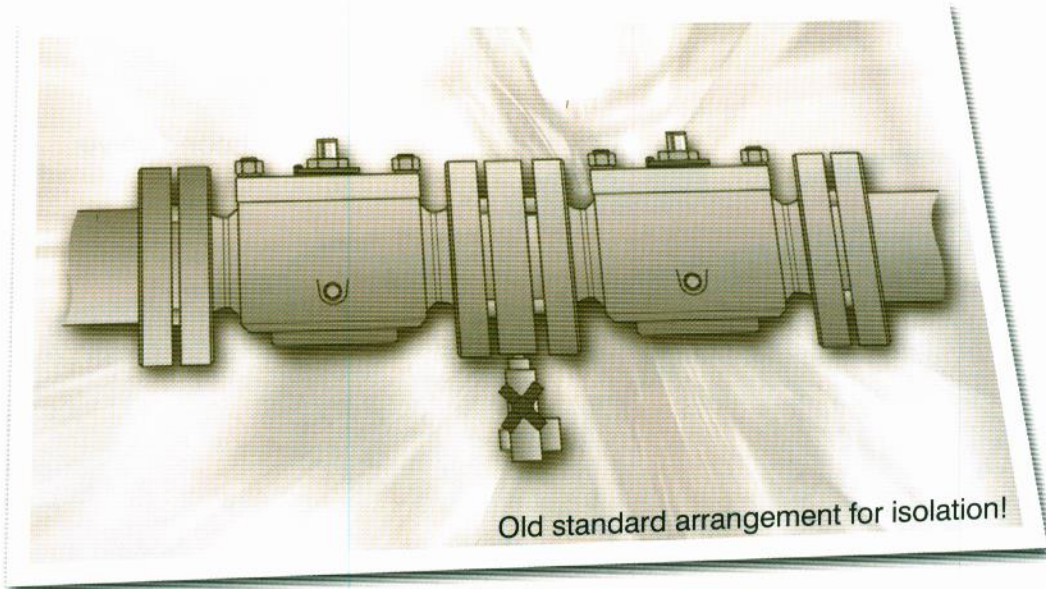


THE WAY TO GO, OUR BETTER SOLUTION, COMPACT AND SAFE!

The "Twin Ball Valve" metal to metal seated, fire safe design, trunnion mounted (from 2").

Range 1" - 12" ANSI 600-2500, API 2000 - 10000


"true" metal to metal seated

carbon steel, stainless steel, duplex and more
manual operated or actuated as appropriated

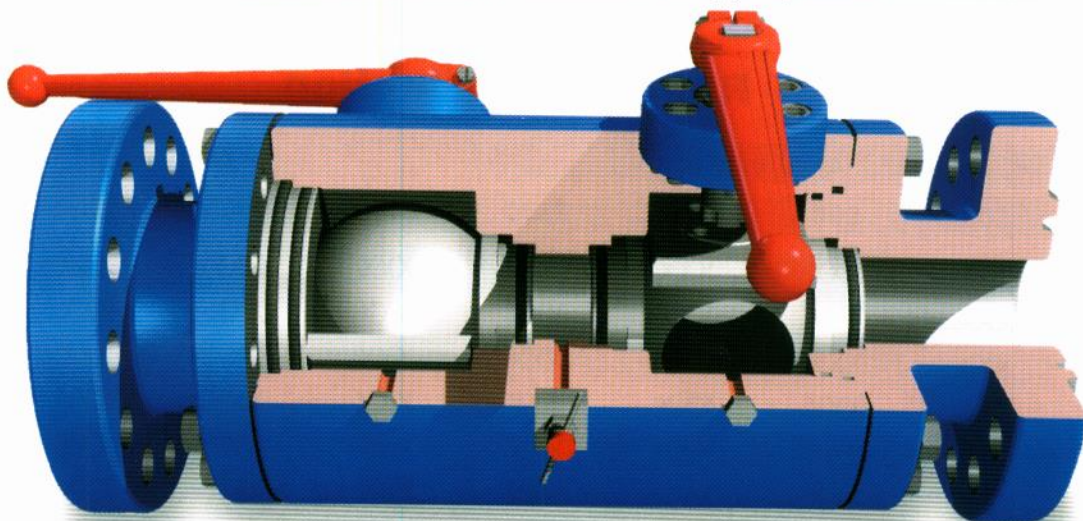

Common applications

Process isolation, bleed and drain line isolation, etc.

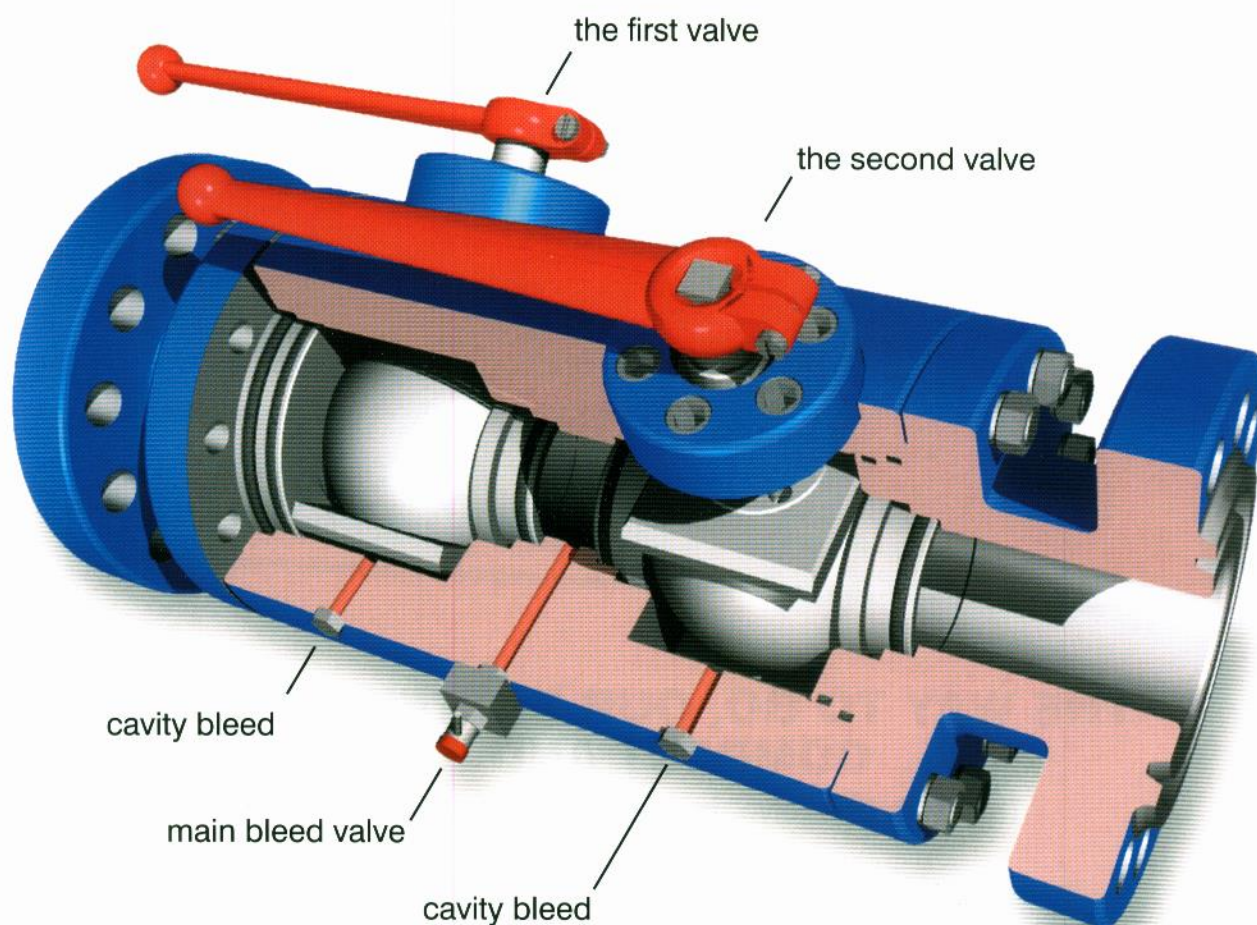

Range of production

size	ANSI valves				API valves			
	600	900	1500	2500	2000	3000	5000	10000
1"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	XXX
2"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	1 13/16"
3"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
4"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
6"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
8"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
10"	XXX	XXX	XXX	XXX	XXX	XXX	XXX	
12"	XXX	XXX			XXX	XXX		